

8

7

6

5

4

3

2

1

H

G

F

E

D

C

B

A

H

G

F


E

D

C

B

A

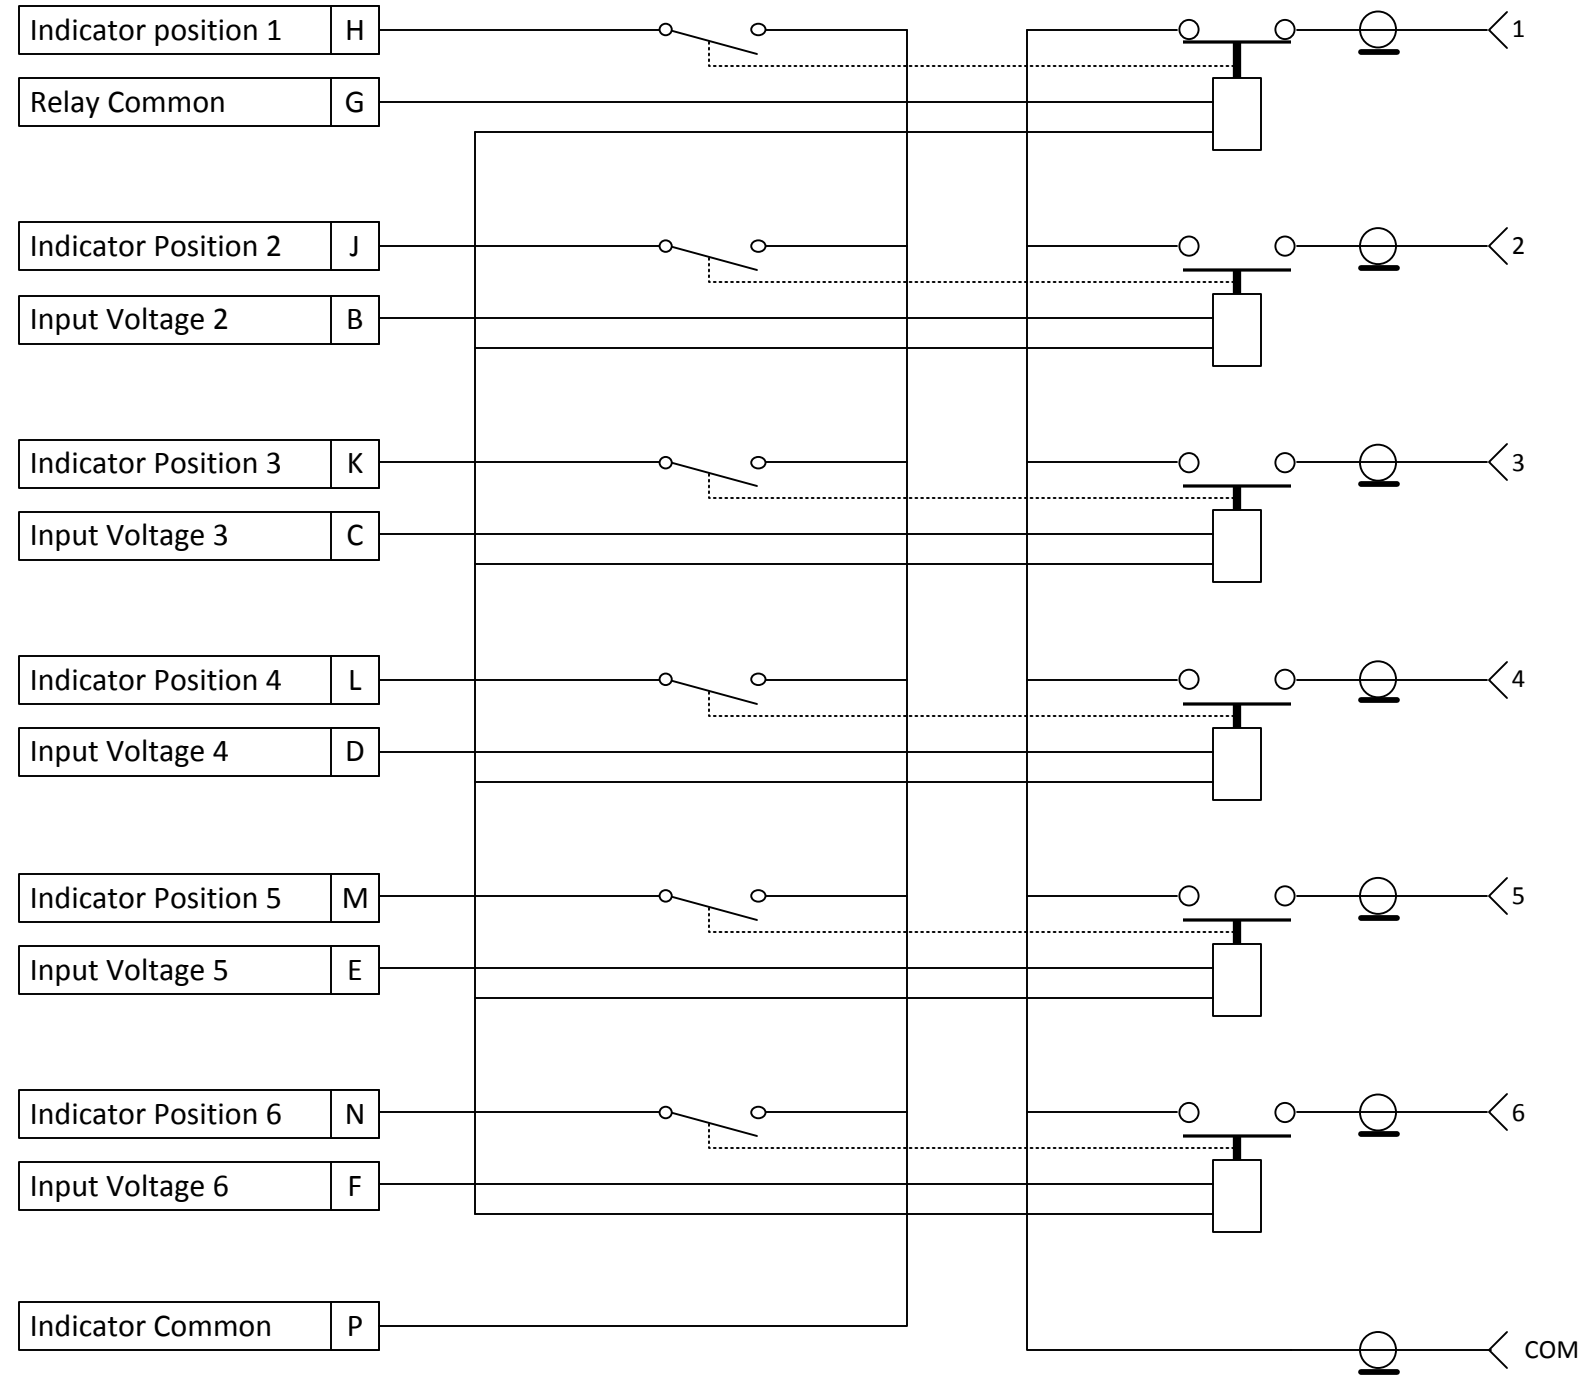

Actuator Data	
Voltage	24-28 VDC 28 VDC Nominal
Current	340 ma Max at 28 VDC 20° C
Switching Time (Max)	20 MS at 28 VDC 20° C

Notes:

- Life: 100,000 operations min in each position.
- Temperature range:
2.1 Operating ambient:
-65° F (-54° C) to +185° F (+85° C)
- Switching operation: Failsafe Position 1
- Immersion proof per MIL-S-3928
- With no power, contact 1 is closed.
- When positions 2-6 are energized, position 1 is de-energized.
- Part number is 116C00200 for this drawing.
- Crosstalk: 60DB Min, 0-12.4 GHz
- VSWR: Linear 1.1 - 1.5, 0-12.4 GHz
- Insertion Loss: .1 DB to .5 DB, 0-12.4 GHz

HAManuals 6022 188 th St. SE Snohomish, WA 98037 (360) 668-9790		<h1>Transco SP6T RF Switch</h1>				
					SIZE	FSCM NO
Bill Turini		SCALE	none	3/18/2004	SHEET	1 OF 1

8

7

6

5

4

3

2

1